





Oras


Installation and maintenance guide





2605F



EN 817
50 - 1000 kPa
0.1 l/s (300 kPa w/Controller)
max. +70°C

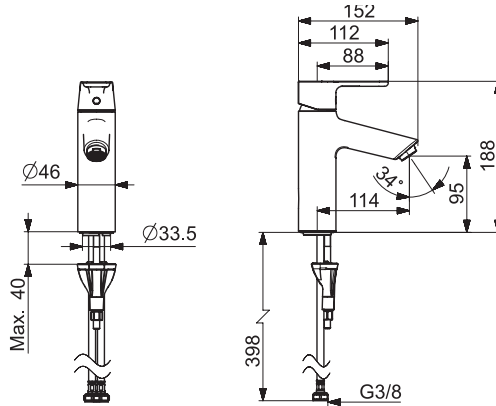

mpi.oras.com/2605F

2605AF/AFS



EN 817
50 - 1000 kPa
0.1 l/s (300 kPa w/Controller)
max. +70°C

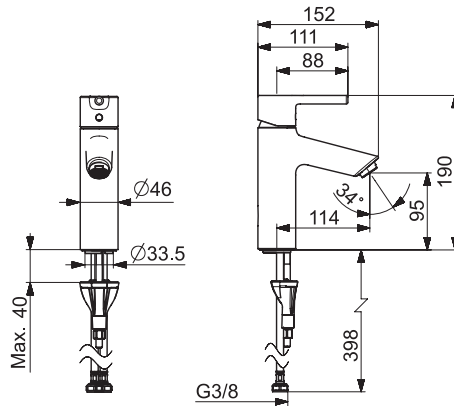

mpi.oras.com/2605AF

2605FH/FHS


EN 817
50 - 1000 kPa
0.1 l/s (300 kPa w/Controller)
max. +70°C

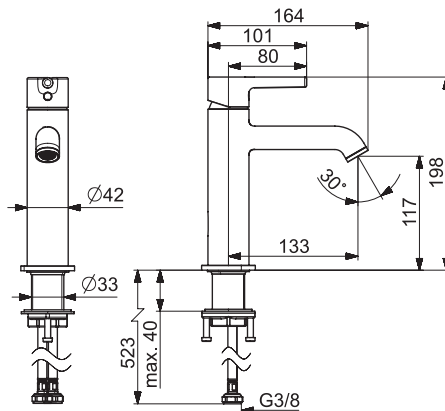

mpi.oras.com/2605FH

2610F



EN 817
50 - 1000 kPa
0.1 l/s (300 kPa w/Controller)
max. +70°C

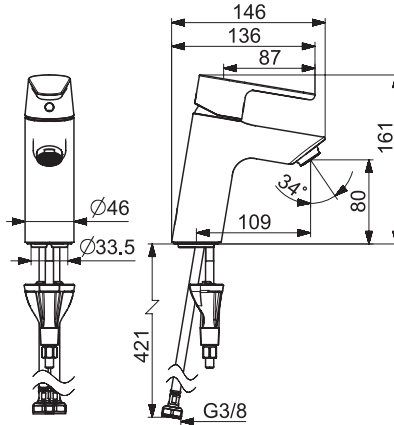

mpi.oras.com/2610F

2610AF/AFS



EN 817
50 - 1000 kPa
0.1 l/s (300 kPa w/Controller)
max. +70°C

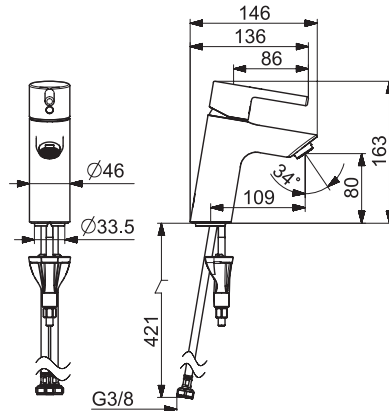

mpi.oras.com/2610AF

2606AF

EN 817
50 - 1000 kPa
0.1 l/s (300 kPa w/Controller)
max. +70°C

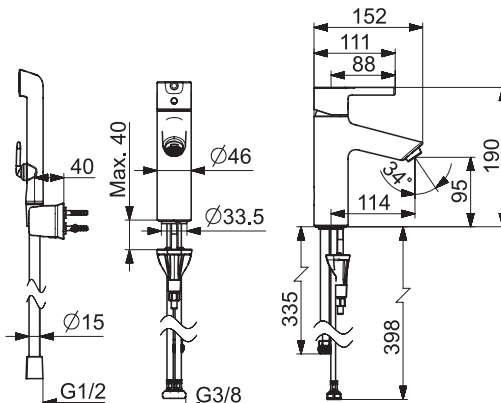


mpi.oras.com/2605FH



2601FH



I (ISO 3822)
 EN 817
 50 - 1000 kPa
 0.1 l/s (300 kPa w/Controller)
 150 kPa (0.1 l/s)
 max. +70°C

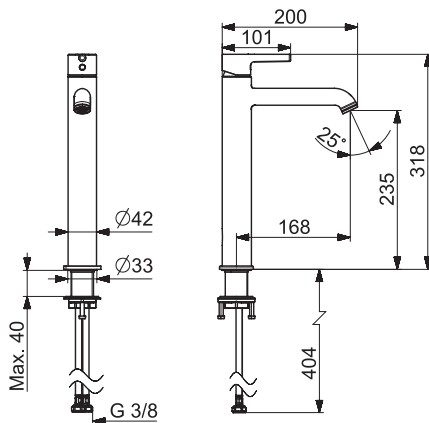

mpi.oras.com/2601FH

2602FH



EN 817
 50 - 1000 kPa
 0.1 l/s (300 kPa w/Controller)
 max. +70°C

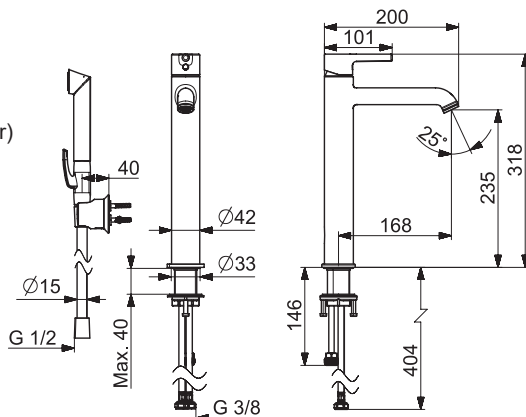

mpi.oras.com/2602FH

2606FH



EN 817
 50 - 1000 kPa
 0.1 l/s (300 kPa w/Controller)
 max. +70°C

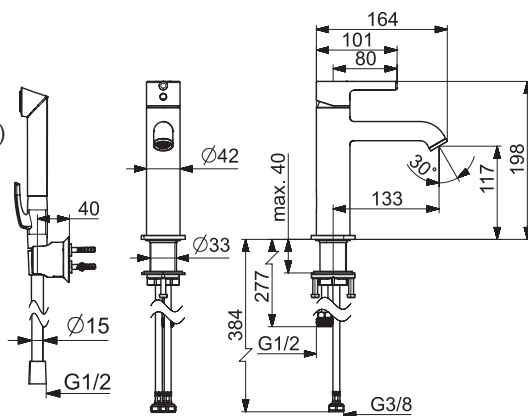

mpi.oras.com/2606FH

2612F


I (ISO 3822)
 EN 817
 50 - 1000 kPa
 0.1 l/s (300 kPa w/Controller)
 150 kPa (0.1 l/s)
 max. +70°C

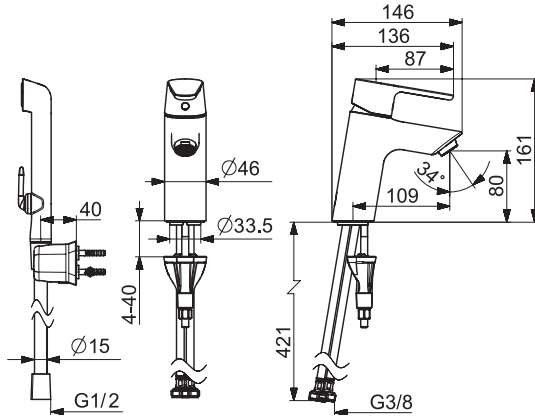

mpi.oras.com/2612F

2611AF


EN 817
 50 - 1000 kPa
 0.1 l/s (300 kPa w/Controller)
 max. +70°C

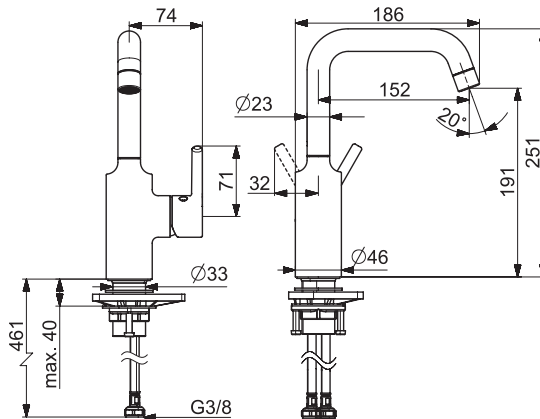








mpi.oras.com/2611AF






2611FH

EN 817
 50 - 1000 kPa
 0.1 l/s (300 kPa w/Controller)
 max. +70°C

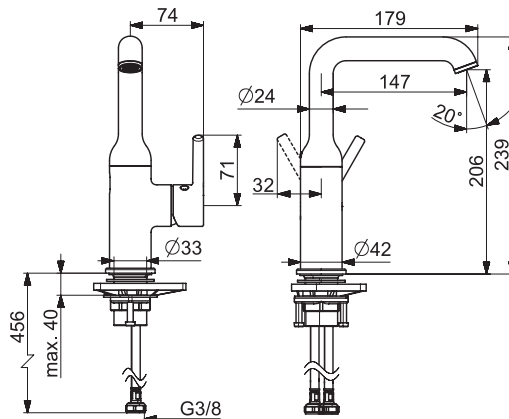



mpi.oras.com/2611FH

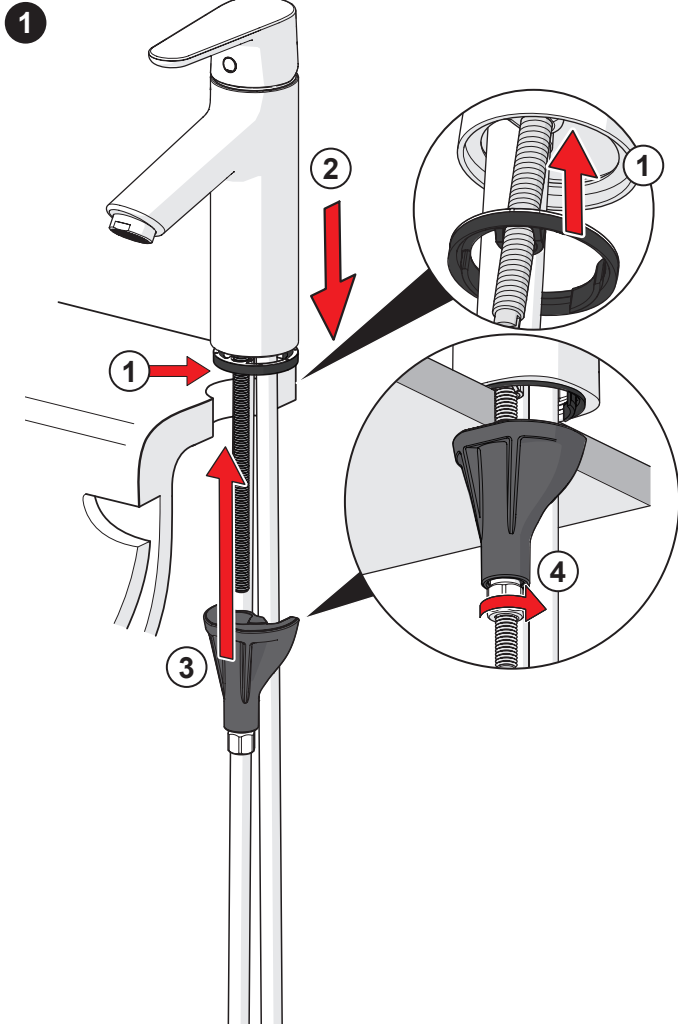

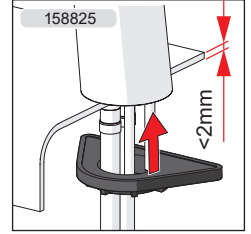

1

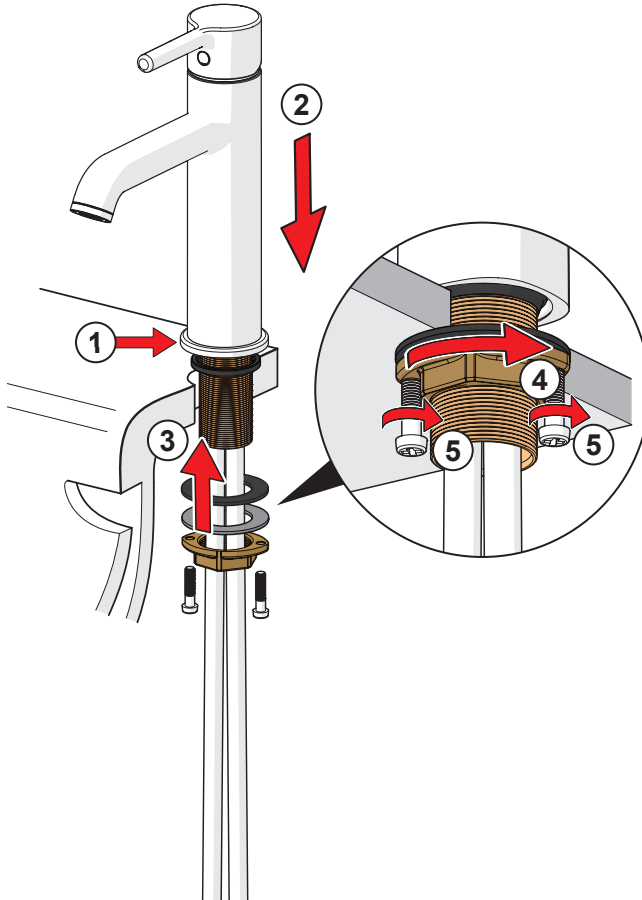






19



1



max.
1600 kPa


2

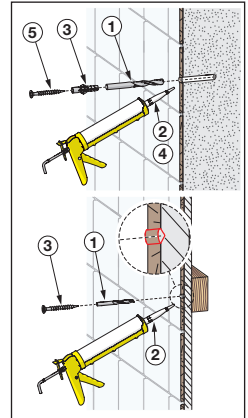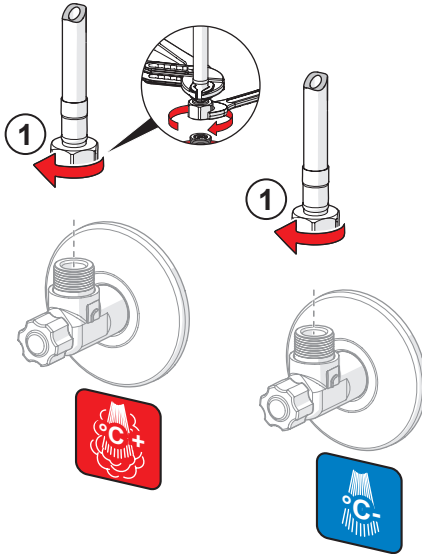








① ② ③

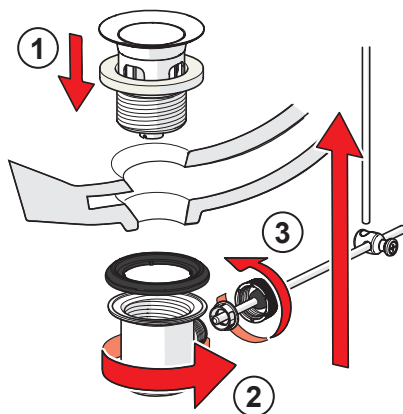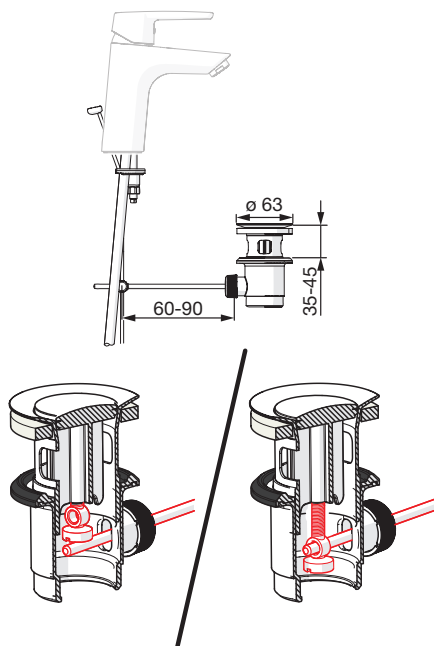








3

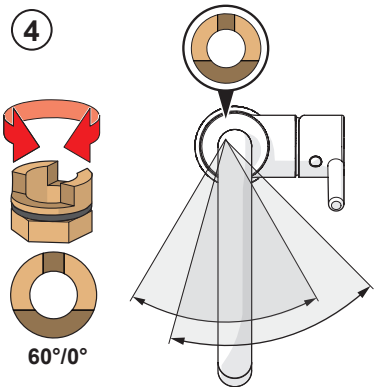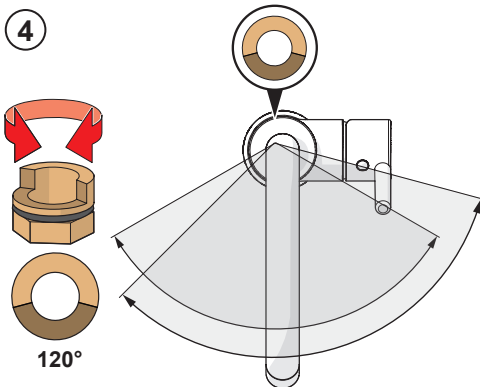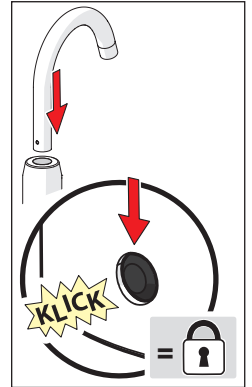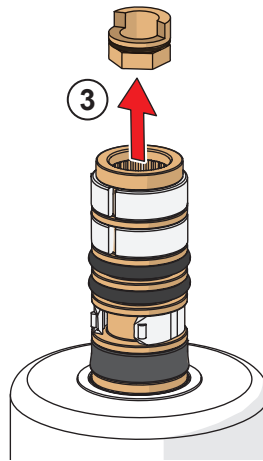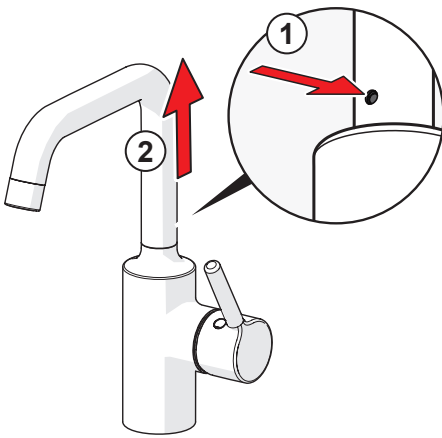


159670/10


159667/10

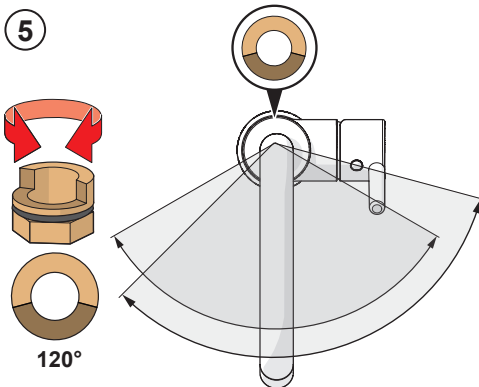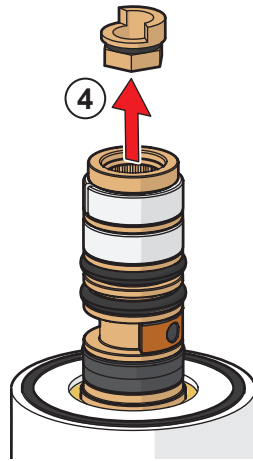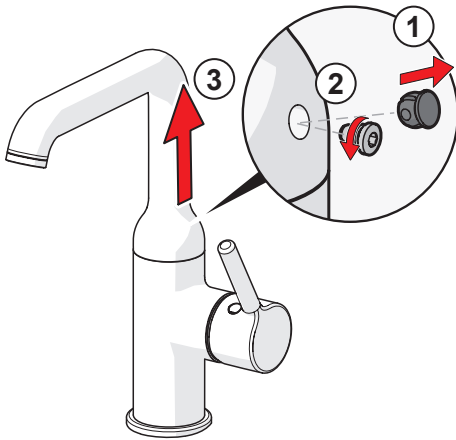




159670/10

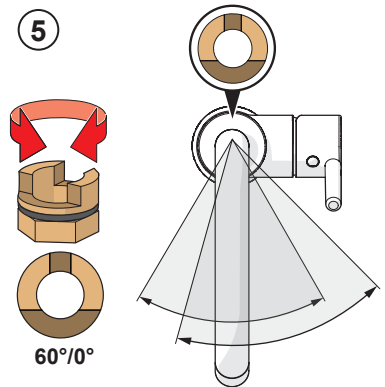


159667/10




①

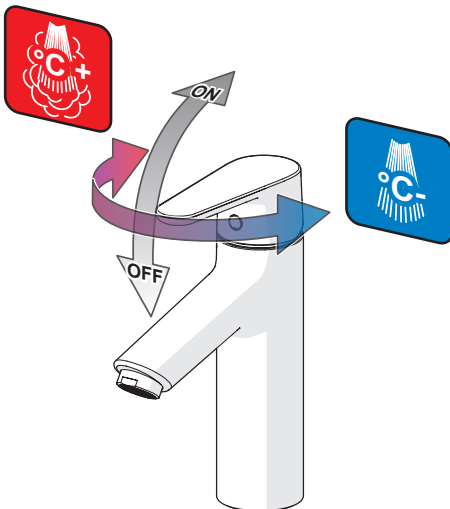
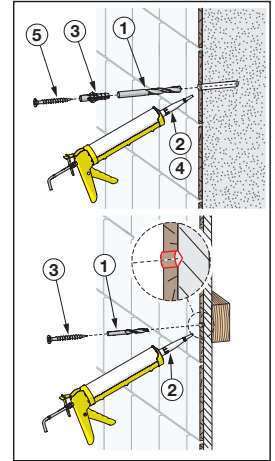
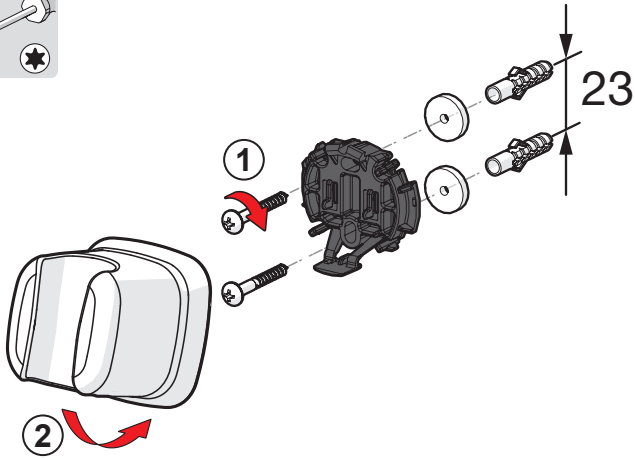



AFS
FHS

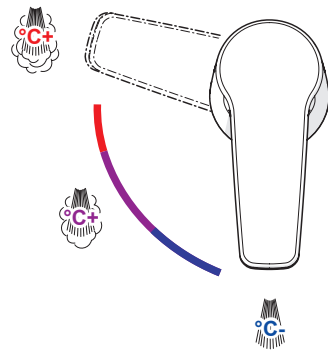












②

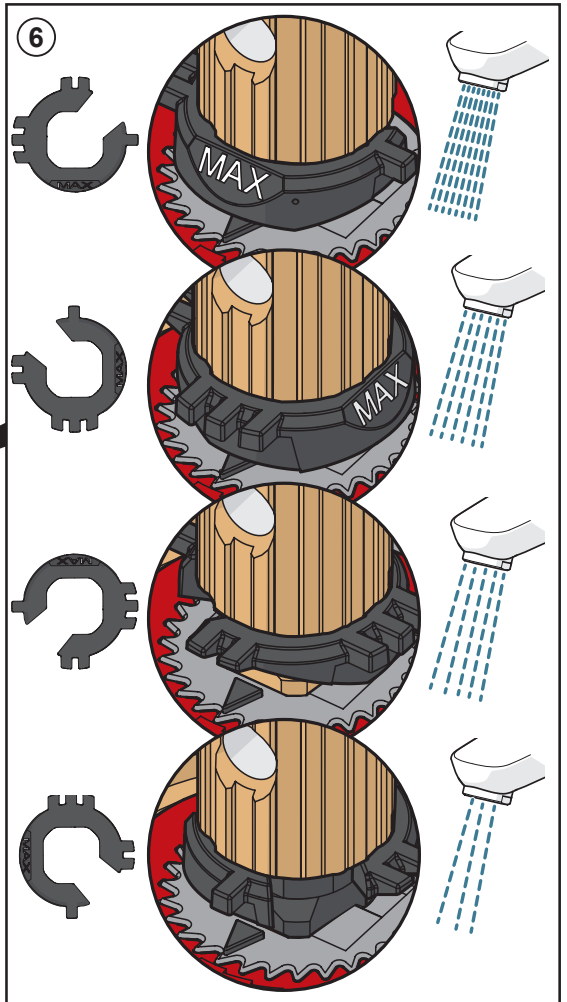
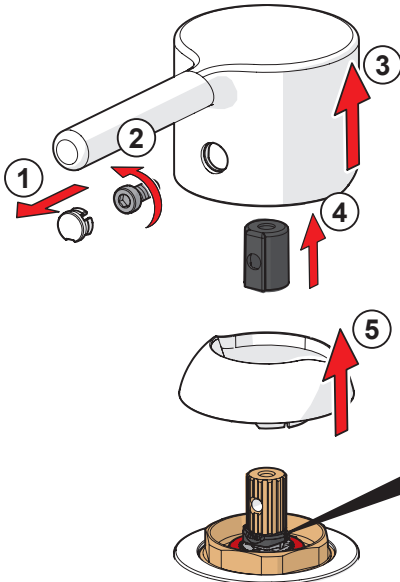





②

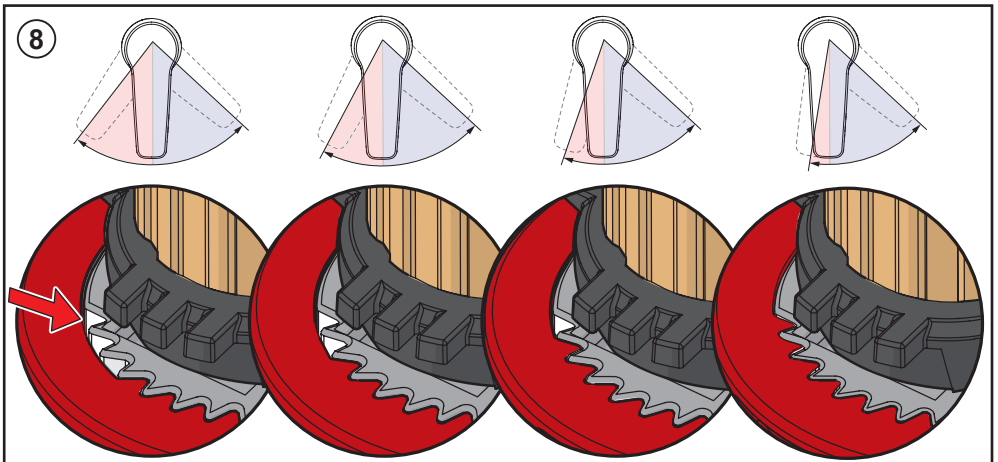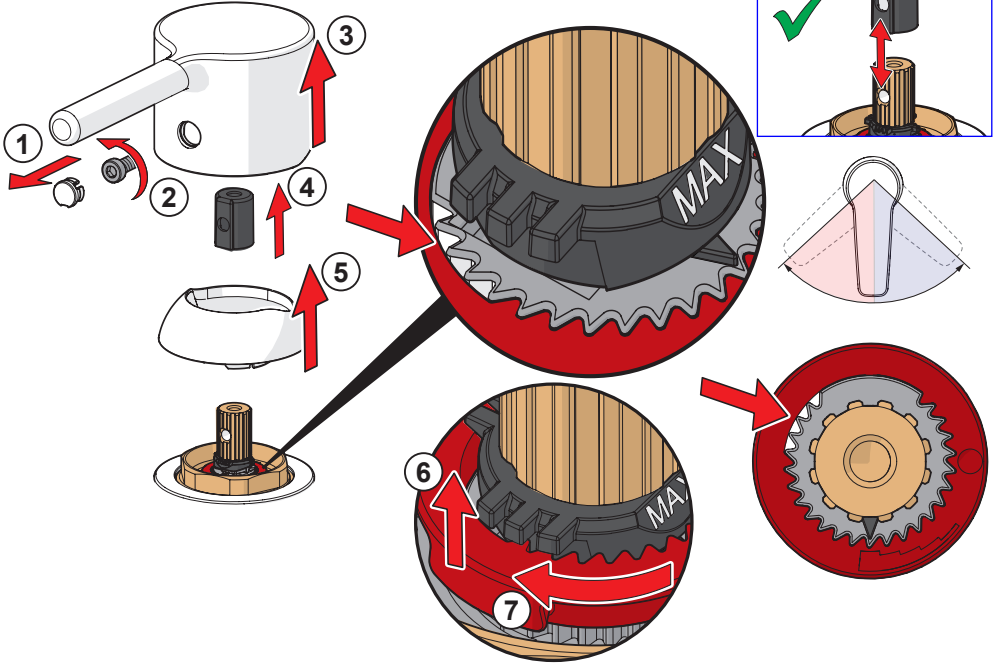

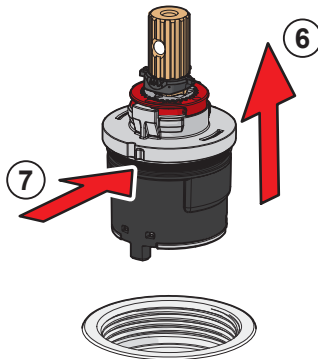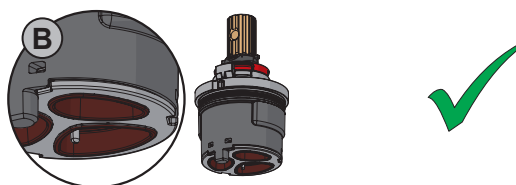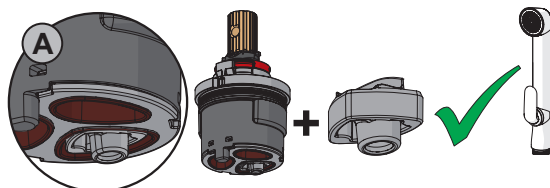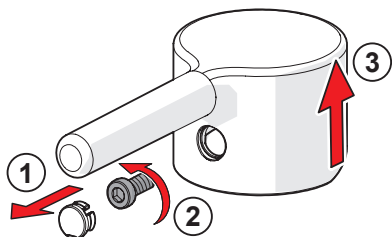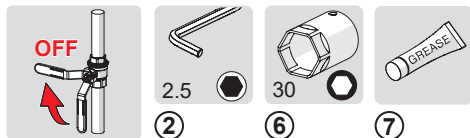

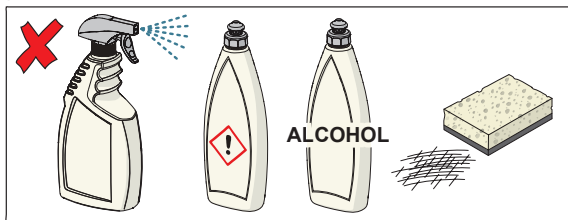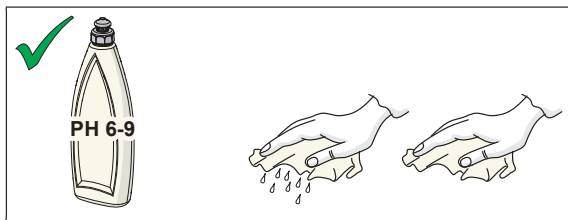

cleaning.oras.com

About Oras Group

Oras Group is a significant European provider of sanitary fittings: the market leader in the Nordics and a leading company in Continental Europe.

The company's mission is to create the smartest water experiences for everyone and its vision is to become the Perfect Flow Company.

The Group has two strong brands, Oras and Hansa. Oras Group is owned by Oras Invest, a family company, and an industrial owner.

The domicile of Oras Ltd, the parent company of the Group, is located in Rauma, Finland, and the Group has three manufacturing sites: Kralovice (Czech Republic), Olesno (Poland) and Rauma (Finland).

The Group operates with its own staff in 17 markets. Oras Group's net sales were 233.5 million euros in 2021 and at the end of the period the company employed 1255 people.

ORAS Ltd
Isometsäntie 2, P.O. Box 40
FI-26101 Rauma
Tel. +358 2 83 161
Fax +358 2 831 6300
info.finland@oras.com
www.oras.com



943479-09-23