



DESIGNLIGHT


SCANDINAVIAN AB

Art nr: P-813MW




E-nr: 74 023 10

Effekt Power	Material Material	Färgtemperatur Color temperature	Armaturfärg Fixture color	Anslutning Connection	Ljusflöde Luminous flux
13W	Aluminium	3000K	Matt White	230V	1200lm

CE, ROHS, IP CERTIFIED BY SGS

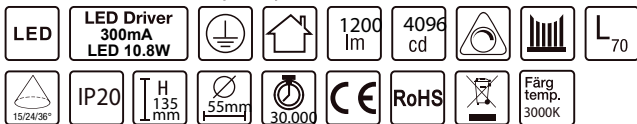


- Dimbar med 300 mA driver
- Dimmable with 300 mA driver
- 92 lm/w med lens, driver
- 92 lm/W with lens, driver
- 108 lm/w utan lens, driver
- 108 lm/W without lens, driver
- CRI Värdet >90
- CRI value >90

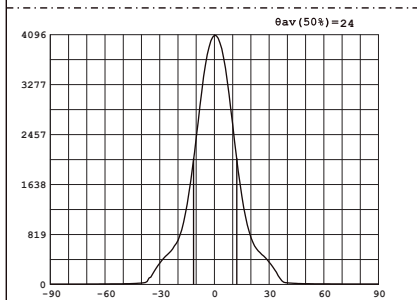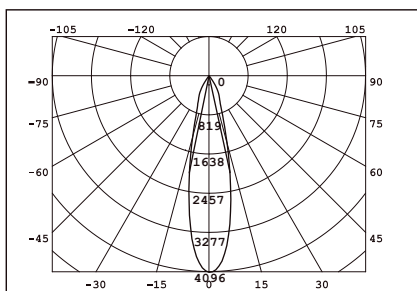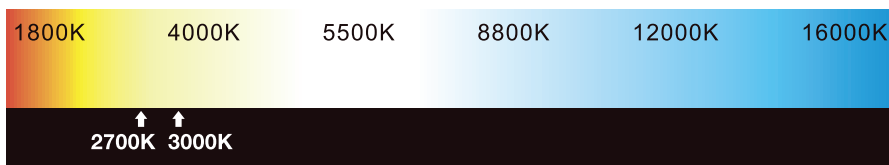


Avstånd	Belysningsstyrka	Spridnings vinkel 24°	Diam.
0.5m	11610.55lx	16444.13lx	20.80cm
1.0m	2902.64lx	4111.03lx	41.61cm
1.5m	1290.06lx	1627.13lx	62.41cm
2.0m	725.66lx	1027.76lx	83.21cm
3.0m	322.52lx	456.78lx	124.82cm


1. Stäng av strömmen/Turn off the power
2. To turn the switch to unlock position to conceal the metal contacts on adaptor, before install the spot light into track.

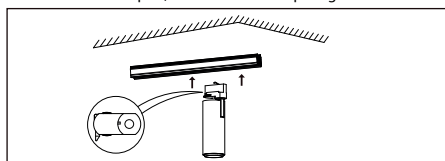


3. To turn the switch clockwise to lock the adaptor, after inserting the spot light into track.

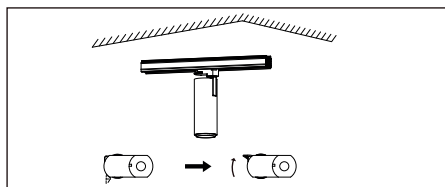

4. To turn the phase selector to the correct phase number. Sequence is 1->0->3->0->2; 0 for void.

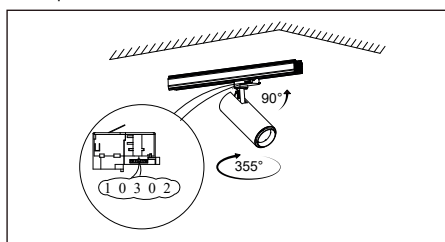

Mått/Dimension

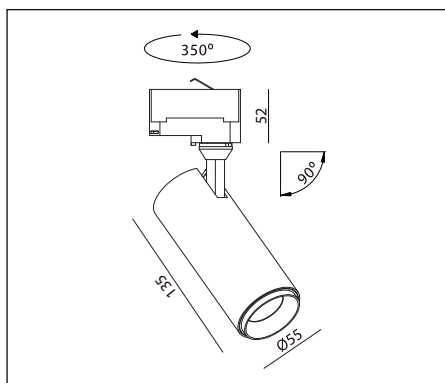

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

874/2012

Komihåg vid montering av downlight LED

Kontrollmät ALLTID diametern före hålltagning i tak. Antal watt per lampax x antalet lampor ger storleken på transformator. Vid installation av LED följ ALLTID kopplingschema.

- OBS! Det är olika transformatorer på LED och halogen.
- 1-2W/kvmm vid mjukare belysning normal takhöjd.
- 3-4W/kvmm vid allmän belysning normal takhöjd.

LED är:

- Miljövänlig och energisnål.
- Lång livslängd, 20.000-50.000 timmar.
- Låg värmeutveckling, stötsäker.

Trivs bäst i kyla, ju lägre temperatur och god luftarea desto bättre ljuseffekt. För ökad livslängd på LED-lampor bör armaturer med kylfläns användas.

Tänk på att ALLDRIG montera downlight direkt mot lättantändligt material. Desto mer luftarea runt den monterade downlighten, desto säkrare blir installationen. Ökad luftarea ger längre livslängd på ljuskälla och armatur.

Things to remember when installing LED downlights

ALWAYS measure the diameter prior to perforation in ceiling. The amount of Watt per light times the number of lights equal the size of transformer. During installation of LED, ALWAYS adhere to the circuit diagram.

N.B. Transformers differ for LED and halogen.

- 1-2W/square meter for softer lighting and standard ceiling height.
- 3-4W/square meter for ambient lighting and standard ceiling height.

LED is:

- Environmentally friendly and energy efficient.
- Long life expectancy, 20 000-50 000 hours.
- Low heat generation, shock resistant.

LED lights perform at best in cold, the lower the temperature and the more air volume, the better the light output. For increased longevity on LED lights, fixtures with heat sinks should be used.

Remember to NEVER install a downlight directly adjacent flammable materials. Sufficient air volume surrounding the installed fixture provides a safer installation. Increased air volume increases life expectancy for both light source and fixture.



DESIGNLIGHT

SCANDINAVIAN AB

Designlight Scandinavian AB | Toffelvägen 1 | SE-342 60 Moheda

Kundcenter: Telefon 0472-716 10 | Fax 0472-716 09 | info@designlight.nu | www.designlight.nu

www.designlight.nu