


## Tekniske data



Total tykkelse	EN 428	mm	2.25
Tykkelse slitesjikt	EN 429	mm	0.70
Vekt	EN 430	g/m <sup>2</sup>	2815
Bredde	EN 426	m	3
Lengde	EN 426	lm	20
Overflatebehandling	-	-	Pureclean
Europaklasse	EN 685	klasse	34 - 43
Brannklassifisering	EN 13501-1	klasse	Bfl-s1
Slitasjegruppe	EN 649	gruppe	T
Trinnlydsdemping	EN ISO 717-2	dB	≤ 5
Kjemikaliebestandighet	EN 423	-	OK
Friksjon, våt	DIN 51 130	klasse	R10
Dimensjonsstabilitet	EN 434	%	0.40
Inntrykksfasthet	EN 433	mm	≤ 0.10
Varmemotstand	EN 12 524	W/(m.k)	0.25
Fargebestandighet	EN 20 105 - B02	skala	≥ 6
Antibakterie og muggbehandling	-	-	Sanosol®

## CE MERKING

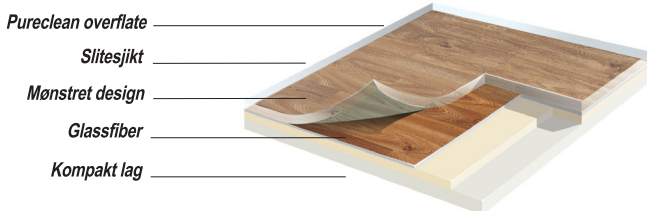

EN 14041



Bruksområder:

